


Impact Wrenches

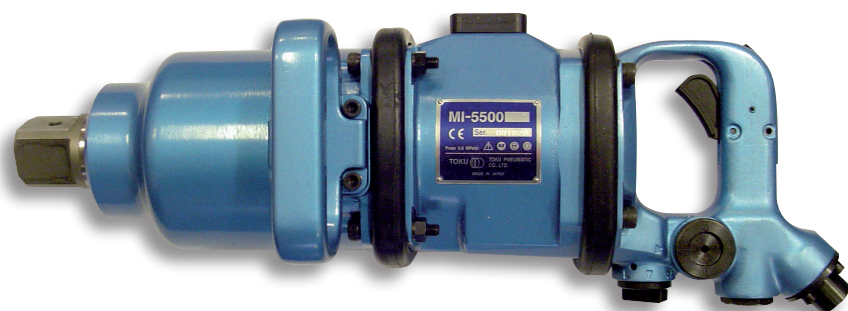


MI-5500ES

- 1½" Square Drive
- 5,500Nm Max Torque output
- Suitable for industrial, civil engineering & offshore applications
- Dynapact hammer impact mechanism for enhanced tool protection & high power output
- 4 level power adjustment
- Ergonomic & well balanced in-line design

Type	A	A*	B
	mm	mm	mm
MI-5500ES	553		63

Type	MI-5500ES
Brand	TOKU
Square drive	1½"
Type	Hole type
Bolt capacity mm	52
Impact mechanism	Dynapact
RPM	2,800
Torque Nm	5,500
Power adjustment	R/L 4 levels
Air cons. l/s	15.0
Weight kg	18.1
Inlet thread	PT 1/2"
Hose diameter mm	13
Vibration m/s ²	14.3
Noise level dB(A)	109

IMPACT MECHANISMS

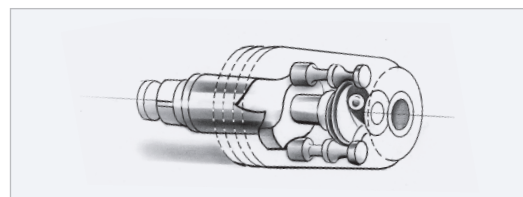

The Dynapact impact system has two pins hammering on the anvil, making 1 impact per rotation at both sides of the anvil at the same time. This system gives high torque output and is well balanced.

Product Code	ELV - Daily Exposure Limit Value EAV - Daily Exposure Action Value	
	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
MI-5500ES	0.59	0.15



REPAIR & SERVICE DEPARTMENT

From the Yokota UK service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.

- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service