

ROCK DRILLS - 20KG



Vibration Control

A selection of our tools are fully equipped with a range of vibration reducing design features for smoother operation and greater comfort. By selecting a vibration controlled option, you not only decrease any potential health risks to your tool operators, but you could also massively increase your productivity levels. The vibration control feature increases the length of time the tool can be used before current ELV & EAV levels are reached.

TJ-20SV LBS


- 20kg Class Rotary Rock Drill
- 22 x 108mm Hex Shank
- Vibration control from damping handles
- Suitable for quarry rock drilling applications
- Ergonomic & well balanced design
- Integrated noise muffler for operator comfort
- Up to 2,400 Blows per minute

Type	TJ-20SV LBS
Brand	TOKU
Shank size mm	Hex 22 x 108
Bore diameter mm	68
Stroke mm	49
Blows p/min	2,400
RPM	200
J/Blow	72.0
Air cons. l/s	41
Weight kg	19.0
Inlet thread	PT 3/4"
Hose diameter mm	19
Vibration m/s ²	10.8
Noise level dB(A)	100



TECHNICAL DATA

Type	A mm	B mm
TJ-20SV LBS	385	585

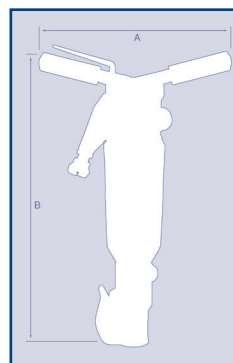

ELV - Daily Exposure Limit Value EAV - Daily Exposure Action Value		
Product Code	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
TJ-20SV LBS	1.43	0.26



REPAIR & SERVICE DEPARTMENT

From the Yokota UK service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.

- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service