

PAVEMENT BREAKERS - 20 KG



Vibration Control

A selection of our tools are fully equipped with a range of vibration reducing design features for smoother operation and greater comfort. By selecting a vibration controlled option, you not only decrease any potential health risks to your tool operators, but you could also massively increase your productivity levels. The vibration control feature increases the length of time the tool can be used before current ELV & EAV levels are reached.



Anti-Freeze

Toku Heavy duty hammers & pavement breakers are fitted with a muffler manufactured from Polyolefin foam which prevents the main cylinder contracting under cold & damp conditions, fully eliminating any risk of the piston jamming.

TPB-40SV


- 20kg Class Pavement Breaker
- 25 x 108mm Hex Shank
- Vibration control from vibration damping handles
- Suitable for large area pavement breaking, pavement reinstatement & trenching
- Ergonomic & well balanced design
- Integrated noise muffler for operator comfort
- Latch chisel retainer allowing the use of wide cutting chisels

Type	TPB-40SV
Brand	TOKU
Shank size mm	Hex 25 x 108
Bore diameter mm	44
Stroke mm	146
Blows p/min	1,050
J/Blow	110
Air cons. l/s	26
Weight kg	19.5
Inlet thread	PT 1/2"
Hose diameter mm	19
Vibration m/s ²	5.5
Noise level dB(A)	106



TECHNICAL DATA

Type	A mm	B mm
TPB-40SV	649	390

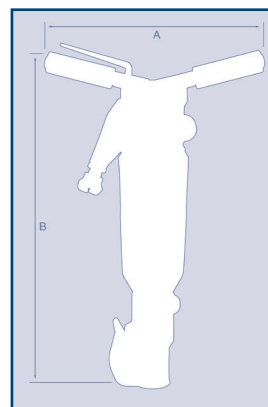

ELV - Daily Exposure Limit Value

EAV - Daily Exposure Action Value

Product Code	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
TPB-40SV	6.37	1.39



REPAIR & SERVICE DEPARTMENT

From the Yokota UK service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.

- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service