

SCREWDRIVERS

Clutch type mechanism (adjustable)




Type	Brand	Square hex drive	Bolt capacity mm	Model	RPM	Torque Nm	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s ²	Sound level dB(A)
YD-400SCA	YOKOTA	1/4" Hex	4	Recht	1.700	1 - 3,2	2,5	0,56	PT 1/8"	6,5	4	77
RR-02SC	RR	1/4" Hex	5	Recht	1.800	1 - 6	10,0	1,2	PT 1/4"	10	1,6	85
RR-06SC	RR	1/4" Hex	6	Recht	800	5 - 16	10,0	1,4	PT 1/4"	10	1,6	85
YD-5PHCA	YOKOTA	1/4" Hex	5	Pistol	1.650	1 - 6,6	5,8	1,2	PT 1/4"	6,5	2	77
RR-02SP	RR	1/4" Hex	5	Pistol	1.800	1 - 6	10,0	1,3	PT 1/4"	10	1,6	85
RR-06SP	RR	1/4" Hex	6	Pistol	800	5 - 16	10,0	1,4	PT 1/4"	10	3,5	83

DIMENSIONS

Type	A mm	B mm	C mm
YD-3A	168	13,5	-
YD-4A	180	16	-
YD-5A	200	19	-
YD-5PHCA	217	20	154
YD-40PZ	107	18	125
YD-400SCA	209	16,5	-
YD-600SZ	206	23	-
YD-670A-RF (3/8)	149	22	167

Type	A mm	B mm	C mm
MID-600	149	22	161
RR-02SP / RR-06SP	214	21	155
RR-06SC	227	21	-
RR-02SC	260	21	-
RR-0800DD	190	21	165
RR-1800DD	175	21	165

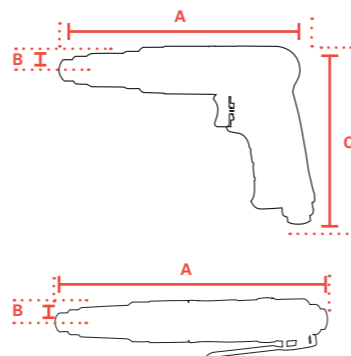

All screwdrivers adapt 1/4" standard type hexagon \ insert bits and are reversible.

CONTROL

1-Hammer	
YD-3A	Push start
YD-4A	Push start
YD-5A	Push start

2-Hammer	
MID-600	Trigger start
YD-40PZ	2-step trigger
YD-600SZ	Lever start
YD-670A-RF (3/8)	2-step trigger

Direct drive	
RR-0800DD	Trigger start
RR-1800DD	Trigger start

Slipping clutch (adjustable)	
YD-400SCA	Trigger start
YD-5PHCA	2-step trigger
RR-02SP/RR-06SP	Lever start
RR-02SC/RR-06SC	2-step trigger

SIDE HANDLES

Type	Order Number
RR-06SP	75-725139-0001S +822340

* Supplied as standard

SILENCER HOSE SET

Type	Order Number
RR-0800DD	EH-701SUB
RR-1800DD	
RR-02SP	
RR-06SP	



TORQUE SPRINGS

Automotive models RR-02SP/SC and RR-06SP/SC are supplied with 2 torque springs.

SCREW SPANNER

The YD-400SCA and YD-5PHCA are supplied with screw spanner 2201-0243-00-00.

SPRING BALANCERS

Use a spring balancer for the tools to become "weightless" thus greatly reducing operator fatigue.

DRILLS



PISTOL MODELS

Type	Brand	Capacity steel mm	Spindle size	Rotation direction	RPM	Power kW	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s ²	Sound level dB(A)
RRI-2006	RRI	6,5	3/8" x 24 UNF	R	5.000	0,21	10,8	0,65	PT 1/4"	10	3	79
RRI-2206/28	RRI	6,5	3/8" x 24 UNF	R	2.800	0,26	7,6	0,60	PT 1/4"	10	0,4	84
RRI-2206/40	RRI	6,5	3/8" x 24 UNF	R	4.000	0,26	7,6	0,60	PT 1/4"	10	0,6	86
YRD-6NBK	YOKOTA	6-8	3/8" x 24 UNF	R	2.800	0,33	8,3	0,90	PT 1/4"	10	3	76
YRD-8NBK	YOKOTA	8-10	3/8" x 24 UNF	R	1.900	0,38	10	1,30	PT 1/4"	10	3	75
RR-10DP	RR	10	3/8" x 24 UNF	L/R	1.800	0,35	8	1,1	PT 1/4"	10	4	83
YRD-10NBK	YOKOTA	10-13	1/2" x 20 UNF	R	1.000	0,44	10	1,50	PT 1/4"	10	1,3	80
YRD-13NBK	YOKOTA	13	1/2" x 20 UNF	R	700	0,50	13,3	1,6	PT 1/4"	10	0,8	79
RR-13DP	RR	13	3/8" x 24 UNF	L/R	800	0,35	8	1,3	PT 1/4"	10	4	83
RRI-2116P ¹⁾	RRI	16	1/2" x 20 UNF	R	950 ²⁾	0,50	11	2,4	PT 1/4"	10	1,8	82

¹⁾ Supplied with hose set silencer / ²⁾ Remove gears with needle bearings

ANGLE MODEL

Type	Brand	Capacity steel mm	Spindle size	Rotation direction	RPM	Power kW	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s ²	Sound level dB(A)
MD-3312B	TOKU	10	3/8" x 24 UNF	L/R	1.900	0,38	6	0,91	PT 1/4"	6,5	2,3	77

STRAIGHT MODEL


Type	Brand	Capacity steel mm	Spindle size	Rotation direction	RPM	Power kW	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s ²	Sound level dB(A)
10RDS-2500	RR	10	3/8" x 24 UNF	R	2.500	0,37	3,5	1,1	PT 1/4"	6,5	0,4	79
10RDS-4000	RR	10	3/8" x 24 UNF	R	4.000	0,37	3,5	1,1	PT 1/4"	6,5	0,4	79

DRILLS

Dimensions & accessories

DIMENSIONS

Type	A mm	B mm	C mm
RR-10DP	185	165	-
RR-13DP	218	165	-
10RDS-2500	250	-	22
10RDS-4000	250	-	25
MD-3312B	205	93	20
RRI-2006	192	138	14
RRI-2206/28	128	116	14
RRI-2206/40	128	116	14
RRI-2116P	270	168	28
YRD-6NBK	151	140	21
YRD-8NBK	176	150	25
YRD-10NBK	209	150	25
YRD-13NBK	218	145	25

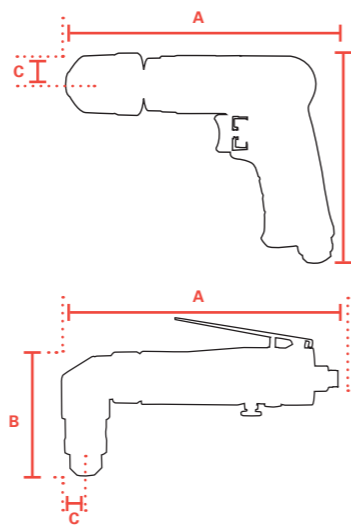

ACCESSORIES

DRILL CHUCKS

Type	Order Number
MD-3312B *	10MM-3/8 x 24NF
RRI-2206/28 *	6MM-3/8 x 24NF
RRI-2206/40 *	6MM-3/8 x 24NF
RRI-2006 *	6MM-3/8 x 24NF
RRI-2116P *	BHP-16 1/2 x 20NF
10RDS-4000 *	10MM-3/8 x 24NF

* Supplied as standard

QUICKCHANGE DRILL CHUCKS

Type	Order Number
RR-10DP *	10035-14
10RDS-2500 *	10035-14
YRD-6NBK *	BHS-10MM
YRD-8NBK *	BHS-10MM
YRD-10NBK *	BHS-13MM
YRD-13NBK *	BHS-13MM
RR-13DP *	10033-14

* Supplied as standard

SIDE HANDLES

Type	Order Number
RR-13DP *	822340 + 75-725139-0001S
RRI-2116P *	2116-061-99
YRD-13NBK	SM-71239 & SM-71240

* Supplied as standard

KEYS FOR DRILL CHUCKS

Type	Order Number
MD-3312B *	90180
RRI-2116P *	90200
RRI-2206/28 *	90160
RRI-2206/40 *	90160

* Supplied as standard

SILENCER HOSE SET

Type	Order Number
RR-10DP	EH-701SUB
RR-13DP	



TAPPING MACHINE



RRI-T330M12

The RED ROOSTER universal tapping machine RRI-T330M12 has been developed for manual thread tapping. The direction of rotation and speed are easily adjusted with the rocker switch. It is an ergonomically developed tool that fits well in the hand. Exhaust through grip, sound muffled. Thanks to the quick-change holder, different sizes of tap holders can be changed quickly and easily.



FEATURES

- Can be used both left and right handed
- Side handle included for extra stability
- Low air consumption
- Low in vibrations
- Can be used for M6 to M12 taps
- With quick-change holder for quick switch of tap holders
- Exhaust through grip, sound muffled

Tap holders RRI-T330M12 (order separately)



Type	Brand	Capacity steel	Spindle size	Rotation direction	RPM	Power kW	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s ²	Sound level dB(A)
RRI-T330M12	RRI	M6-M12	B12	L - R	330	0,39	15	1,63	PT 1/4"	10	4	82