

# GRINDERS

## Accessories

### COLLET CHUCKS



Type	Order number	Description
MG-OA	1013-0661-01-99	* 6 mm
MG-OC	1011-0661-00-00	* 6 mm
MG-1B	42-04-90-K10	* 6 mm
MG-7206B	NVK-A10	* 3 mm
	T5-07-10-270	* 6 mm
	T5-07-10-27A	* 1/4"
MG-7236B	3003-035-00	* 6 mm
GS-2EFS/TSG-3L	1104-0661-01-99	- 6 mm
RRG-260RE(L)	51224	* 6 mm
RRG-514RE(L)	51224	* 6 mm
RRG-1000RE(L)	50-500228	* 6 mm
RRG-1000RE(L)	50-500228-18	- 8 mm
RRI-3407	315018	* 6 mm
	315073	- 8 mm

\* Supplied as standard

### TOOLS FOR MOUNTING GRINDING WHEELS AND SANDING PADS



Type	Order number	Description
HS-4	8081-0021-00-00	* Spanner H36
HS-4	8100-2001-00-00	* Forked wrench
G-40 / G-50	8100-1003-00-00	* Bar wrench
G-40 / G-50	8100-2001-00-00	* Forked wrench
G-40 / G-50	8100-3001-00-00	* L-wrench
G-70EF	8100-4003-00-01	Hook wrench
G-70EF	8100-5002-00-00	* Twin wrench
7VC6500FS	8081-0020-00-00	* Spanner H32
7VC8500FS		
G-70EF		
7VC6500FS	13-40-01-006	* Hex wrench 6 mm
7VC8500FS		
TAG-40FLH		
TAG-40FLH	42-05-71-G90	* Wheel ring washer
TAG-40FLH	13-40-04-014	* Combi spanner 14 x 19
TAG-45MLH	13-08-02-147	* Socket bar
TAG-50MLH		
TAG-45MLH		
TAG-50MLH		
TAG-700QJL		
TAG-900QJL	8081-0022-00-00	* Spanner H41
TAG-40FLH	9610-1010-00-00	* Hex wrench H10
TAG-45MLH		
TAG-50MLH		
TAG-700QJL		
TAG-900QJL		
RRI-G50	G50-900-99	* Forked wrench
RRI-G70	5D-651234	* Forked / Twin wrench
RRI-G45HP/G50HP		
RRI-G45HP/G50HP		
RRI-G45HP/G50HP	10022	* Allen wrench

\* Supplied as standard



### M14X2 QUICK NUT

Type	Order number
RRG-2144	QN-M14
RRG-2155	
RRI-G45HP	
RRI-G50HP	
RRI-G70	
TAG-45MLH	
TAG-50MLH	



### ADAPTERS

Type	Order number
MG-OA / MG-OC / MG-1B	1001-0659-00-01
RRI-3425(L/EL) / RRG-500RE(L)	
RRG-200RE(L) / RRG-2090	
RRI-3506	
RRI-T3340 / RRI-T5625 / RRI-3407	



### EXHAUST HOSE/SILENCER KIT

Type	Order number
RRG-2134	EH-6191SUB
RRG-2144	
RRG-2155	




### HOOK & LOOP PADS FOR SANDERS

Type	Order number	Description
RRI-5125-2NV	65-613342*	Pad 125 mm
RRI-5125-5NV		
RRI-5125-2CV	50LVJOSY-P	Pad 125 mm
RRI-5125-5CV		
RRI-5125-2SV	50LVJOSY-P	Pad 125 mm, multi hole
RRI-5125-5SV		
RRI-6150-2NV	610227V-61*	Pad 150 mm
RRI-6150-5NV		
RRI-T6250-5NV		
RRI-6150-2CV	66-613A43	Pad 150 mm, 15 holes
RRI-6150-5CV		
RRI-6150-2SV		
RRI-6150-5SV		
RRI-T6250-5CV		

\* Supplied as standard

Order number
66-613A43
150 mm
15 holes



Order number
50LVJOSY-P
125mm
Multi hole



# SANDERS



Type	Brand	Pad size mm	Stroke mm	RPM	Power kW	Spindle	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s <sup>2</sup>	Sound level dB(A)
HS-4	YOKOTA	127 x 22	-	12.000	0,5	7/16" x 20	9,2	1,1	PT 1/4"	10	2	79
MS-4125B	TOKU	125 x 22	-	20.000	0,5	7/16" UNF	8,3	1,0	PT 1/4"	10	2,3	90

### PALM ORBITAL SANDERS

Type	Brand	Pad size mm	Stroke mm	RPM	Power kW	Spindle	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s <sup>2</sup>	Sound level dB(A)
RRI-5125-2NV	RRI	125	2,5	12.000	0,3	5/16" UNF	4,9	0,6	PT 1/4"	6,5	<2,5	73
RRI-5125-2CV	RRI	125	2,5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-5125-2SV	RRI	125	2,5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-5125-5NV	RRI	125	5	12.000	0,3	5/16" UNF	4,9	0,6	PT 1/4"	6,5	<2,5	73
RRI-5125-5CV	RRI	125	5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-5125-5SV	RRI	125	5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-6150-2NV	RRI	150	2,5	12.000	0,3	5/16" UNF	4,9	0,6	PT 1/4"	6,5	<2,5	73
RRI-6150-2CV	RRI	150	2,5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-6150-2SV	RRI	150	2,5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-6150-5NV	RRI	150	5	12.000	0,3	5/16" UNF	4,9	0,6	PT 1/4"	6,5	<2,5	73
RRI-6150-5CV	RRI	150	5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-6150-5SV	RRI	150	5	12.000	0,3	5/16" UNF	4,9	0,7	PT 1/4"	6,5	<2,5	73
RRI-T6250-5NV	RRI	150	5	12.000	0,3	5/16" UNF	4,9	1	PT 1/4"	6,5	3,65	73
RRI-T6250-5CV	RRI	150	5	12.000	0,3	5/16" UNF	4,9	1	PT 1/4"	6,5	3,65	73

\*) Standard delivered with Hook & Loop pad. NV = No dust extraction / CV = For connection to central dust extraction / SV = Self created Vacuum for dust extraction

### WIRE BRUSH SANDER

Type	Brand	Pad size mm	Stroke mm	RPM	Power kW	Spindle	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s <sup>2</sup>	Sound level dB(A)
RRB-280	RRI	80 <sup>1)</sup>	-	8.000	0,45	M14 x 2 <sup>2)</sup>	9,6	1,5	PT 1/4"	10	9	80

1) Size wire brush (supplied without wire brushes) / 2) Spindle stainless steel

# MINI-SANDERS



Type	Brand	Pad size mm	RPM	Power kW	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s <sup>2</sup>	Sound level dB(A)
RRS-60152 <sup>1)</sup>	RR	50	15.000	0,3	4,9	0,54	PT 1/4"	10	0,74	80
RRS-60153 <sup>2)</sup>	RR	75	15.000	0,3	4,9	0,54	PT 1/4"	10	0,74	80
RRS-60323 <sup>3)</sup>	RR	75	3.200	0,3	4,9	0,75	PT 1/4"	10	0,74	80

<sup>1)</sup> RRS-60152 = mini sander Ø50 mm (Roloc™-Pad) / <sup>2)</sup> RRS-60153 = mini sander Ø75 mm (Roloc™-Pad) / <sup>3)</sup> RRS-60323 = mini polisher Ø75 mm (Velcro Pad)

The RRI mini sanders can be ordered as separate tool or as set (K) with sanding and/or polishing discs. The RRS-60323K is only available as set.

The RRI mini sanders RRS-60152K and RRS-60153K come in a plastic case containing the following sanding pads: 10 x grain 80, 10 x grain 100 and 10 x grain 120. The RRS-60323K comes with 2 polishing pads and 1 polishing bonnet.

The ROLOC™ system ensures quick and safe changing of the pads.

## ACCESSORIES



Polishing discs



Pad RRS-60323



Roloc™ Pad


Type	Order number	Description
RRS-60323	SA-75543VC*	Yellow sponge 3½"
RRS-60323	SA-75653VC*	White sponge 3½"
RRS-60323	SA-77213*	Polishing bonnet 3½"

\* Supplied as standard

Type	Order number	Description
RRS-60152	600125-21	Roloc™ Pad, Ø 50 mm
RRS-60153	600127-31	Roloc™ Pad, Ø 75 mm
RRS-60323	6004-031-00	Velcro sanding pad, Ø 75 mm

## DIMENSIONS

Type	A mm	B mm	C mm	D mm
RRB-280	225	85	28	50
RRG-3611	50	265	-	-
RRG-3612	65	386	-	-
RRG-3617K	50	265	-	-
RRG-3621	60	420	-	-
RRG-3630	60	490	-	-
RRI-5125-2NV/5NV	163	104	-	-
RRI-6150-2NV/5NV	163	104	-	-
RRI-5125-2CV/5CV	213	104	-	-
RRI-6150-2CV/5CV	213	104	-	-
RRI-5125-2SV/5SV	213	104	-	-
RRI-6150-2SV/5SV	213	104	-	-
RRI-T6250-5NV/5CV	262	104	-	-
RRS-60323	116	150	-	-
RRS-60152	116	140	-	-
RRS-60153	116	140	-	-

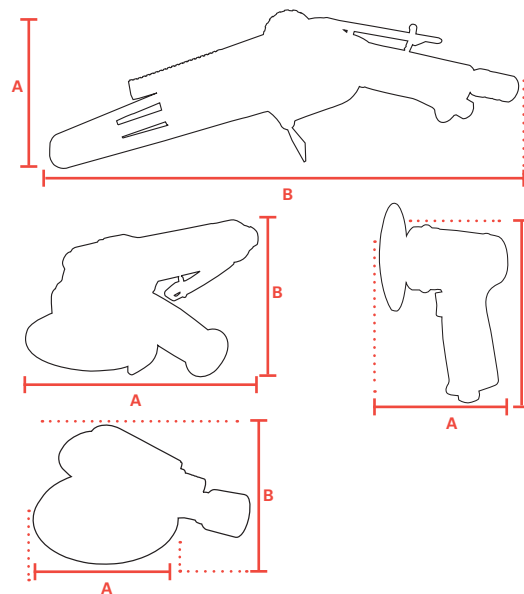

# BELT SANDERS



Type	Brand	Belt size mm	RPM	Power kW	Air cons. l/s	Weight kg	Inlet thread	Hose diameter mm	Vibration m/s <sup>2</sup>	Sound level dB(A)
RRG-3617K	RRI	6/10 x 330	20.000	0,28	6,7	0,8	PT 1/4"	10	0,6	80
RRG-3611	RRI	10 x 330	20.000	0,28	6,7	0,8	PT 1/4"	10	0,6	80
RRG-3612	RRI	6/12 x 610	20.000	0,37	13,7	1,4	PT 1/4"	10	2,36	97
RRG-3621	RRI	20 x 520	18.000	0,34	8,7	1,4	PT 1/4"	10	2,5	79
RRG-3630	RRI	30 x 540	12.000	0,52	10,3	2,2	PT 1/4"	10	2	79

The RRG-3617K is the same as model RRG-3611 however supplied as set. This set contains a sanding arm 6 x 330 and a sanding arm 10 x 330 mm (1 tool, 2 applications).

The RRG-3612 is supplied as a kit. You will receive a grinding arm for 12 x 610 mm and one for 6 x 610 mm as standard. (1 tool, 2 applications).

The Red Rooster belt sanders are suitable for nearly all materials, e.g. steel, aluminium, plastics and wood and for use as a de-burring method in difficult access applications. All belt sanders are executed with safety handle and adjustable silencer and a regulator screw to reduce the RPM when handling sensitive materials.

## ACCESSORIES



Sanding belt for 6 mm sanding arm			Sanding belt for 6 mm sanding arm			Sanding belt for 10 mm sanding arm		
SSB60660	6 x 330 mm	Grain 60	SSB61260	6 x 610 mm	Grain 60	SSB61060	10 x 330 mm	Grain 60
SSB60680	6 x 330 mm	Grain 80	SSB61280	6 x 610 mm	Grain 80	SSB61080	10 x 330 mm	Grain 80
SSB606100	6 x 330 mm	Grain 100	SSB612100	6 x 610 mm	Grain 100	SSB610100	10 x 330 mm	Grain 100
SSB606120	6 x 330 mm	Grain 120	SSB612120	6 x 610 mm	Grain 120	SSB610120	10 x 330 mm	Grain 120
SSB606150	6 x 330 mm	Grain 150	SSB612150	6 x 610 mm	Grain 150	SSB610150	10 x 330 mm	Grain 150
Sanding belt for 12 mm sanding arm			Sanding belt for 20 mm sanding arm			Sanding belt for 30 mm sanding arm		
SSB61260	12 x 610 mm	Grain 60	SSB62060	20 x 520 mm	Grain 60	SSB63060	30 x 540 mm	Grain 60
SSB61280	12 x 610 mm	Grain 80	SSB62080	20 x 520 mm	Grain 80	SSB63080	30 x 540 mm	Grain 80
SSB612100	12 x 610 mm	Grain 100	SSB620100	20 x 520 mm	Grain 100	SSB630100	30 x 540 mm	Grain 100
SSB612120	12 x 610 mm	Grain 120	SSB620120	20 x 520 mm	Grain 120	SSB630120	30 x 540 mm	Grain 120
SSB612150	12 x 610 mm	Grain 150	SSB620150	20 x 520 mm	Grain 150	SSB630150	30 x 540 mm	Grain 150