


# RATCHET WRENCHES

## Dimensions

| Type     | A mm | B mm | C mm | D mm | E mm | F mm |
|----------|------|------|------|------|------|------|
| MR-2207C | 165  | 33   | -    | -    | -    | -    |
| MR-2209C | 165  | 33   | -    | -    | -    | -    |
| MR-2310B | 255  | 44   | -    | -    | -    | -    |
| MR-2410B | 255  | 50   | -    | -    | -    | -    |
| RRW-121  | 357  | 57   | -    | -    | -    | -    |
| RRW-2202 | 180  | 32   | -    | -    | -    | -    |
| RRW-2203 | 180  | 32   | -    | -    | -    | -    |
| RRW-2403 | 250  | 40   | -    | -    | -    | -    |
| RRW-2404 | 250  | 45   | -    | -    | -    | -    |
| RRW-3403 | 280  | 40   | -    | -    | -    | -    |
| RRW-3404 | 280  | 45   | -    | -    | -    | -    |
| YRW-6    | 320  | 13   | 13   | 88   | 20   | 10   |
| YRW-8NS  | 350  | 18   | 13   | 105  | 25   | 12,5 |
| YRW-10N  | 388  | 18   | 18   | 108  | 33   | 16,5 |

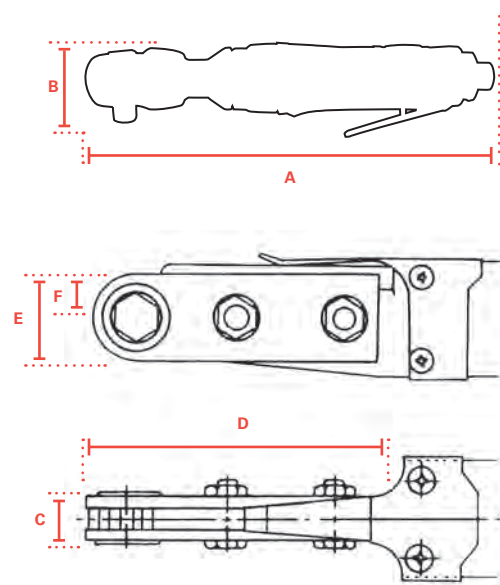

# SCREWDRIVERS

## Hammermechanism & Direct drive



### 1-HAMMER

| Type                | Brand  | Square hex drive | Bolt capacity mm | Model | RPM    | Torque Nm | Air cons. l/s | Weight kg | Inlet thread | Hose diameter mm | Vibration m/s <sup>2</sup> | Sound level dB(A) |
|---------------------|--------|------------------|------------------|-------|--------|-----------|---------------|-----------|--------------|------------------|----------------------------|-------------------|
| YD-3A <sup>1)</sup> | YOKOTA | 1/4" Hex         | 4                | Recht | 12.000 | 7,5       | 1,6           | 0,50      | PT 1/8"      | 6,5              | 2,3                        | 82                |
| YD-4A <sup>1)</sup> | YOKOTA | 1/4" Hex         | 5                | Recht | 11.000 | 12        | 2,3           | 0,60      | PT 1/8"      | 6,5              | 2                          | 90                |
| YD-5A <sup>1)</sup> | YOKOTA | 1/4" Hex         | 6                | Recht | 10.000 | 15,5      | 3,2           | 0,85      | PT 1/8"      | 6,5              | 2,5                        | 90                |

### 2-HAMMER

| Type                     | Brand  | Square hex drive | Bolt capacity mm | Model  | RPM    | Torque Nm | Air cons. l/s | Weight kg | Inlet thread | Hose diameter mm | Vibration m/s <sup>2</sup> | Sound level dB(A) |
|--------------------------|--------|------------------|------------------|--------|--------|-----------|---------------|-----------|--------------|------------------|----------------------------|-------------------|
| MID-600 <sup>2)</sup>    | TOKU   | 1/4" Hex         | 3-5              | Pistol | 9.500  | 90        | 5,0           | 0,9       | PT 1/4"      | 6,5              | 3,6                        | 82                |
| YD-40PZ                  | YOKOTA | 1/4" Hex         | 4                | Pistol | 14.000 | 15        | 1,6           | 0,52      | PT 1/4"      | 6,5              | 4                          | 80                |
| YD-600SZ <sup>2)</sup>   | YOKOTA | 1/4" Hex         | 6                | Recht  | 7.500  | 37        | 5,0           | 0,95      | PT 1/4"      | 6,5              | 1,6                        | 77                |
| YD-670A-RF <sup>3)</sup> | YOKOTA | 1/4" Hex         | 6                | Pistol | 7.500  | 90        | 6,1           | 0,98      | PT 1/4"      | 6,5              | 1,5                        | 75                |

### DIRECT DRIVE

| Type      | Brand | Square hex drive | Bolt capacity mm | Model  | RPM   | Torque Nm | Air cons. l/s | Weight kg | Inlet thread | Hose diameter mm | Vibration m/s <sup>2</sup> | Sound level dB(A) |
|-----------|-------|------------------|------------------|--------|-------|-----------|---------------|-----------|--------------|------------------|----------------------------|-------------------|
| RR-0800DD | RR    | 1/4" Hex         | 6                | Pistol | 800   | 10,5      | 9,8           | 1,0       | PT 1/4"      | 10               | 3,5                        | 83                |
| RR-1800DD | RR    | 1/4" Hex         | 6                | Pistol | 1.800 | 7,5       | 9,8           | 1,0       | PT 1/4"      | 10               | 3,5                        | 83                |

1) Delivered with regulator / 2) 4 settings power adjustment / 3) Delivered with rubber protection cover

### SELECTION GUIDE: TYPE OF SCREWDRIVER PER APPLICATION

| Type                 | Machine screw 4.8 | Machine screw 8.8 | Self tapping screw-M | Self tapping screw-ST | Self tapping screw-ST, for plastic | Self-drilling/ Self-tapping Screw-S | Wood screw |
|----------------------|-------------------|-------------------|----------------------|-----------------------|------------------------------------|-------------------------------------|------------|
| Impact               | Green             | Green             | Green                | Green                 | Red                                | Green                               | Green      |
| Direct drive         | Green             | Green             | Green                | Green                 | Red                                | Green                               | Green      |
| Clutchtype mechanism | Green             | Green             | Green                | Green                 | Green                              | Green                               | Green      |
| Shut-off mechanism   | Green             | Green             | Green                | Green                 | Green                              | Green                               | Green      |

Green Recommended Orange OK Red not OK  
For suitable impact sockets please refer to chapter on impact sockets.