


AIR ANGLE GRINDER ACCESSORIES

ACCESSORIES

RUBBER PADS

Used with coated abrasives

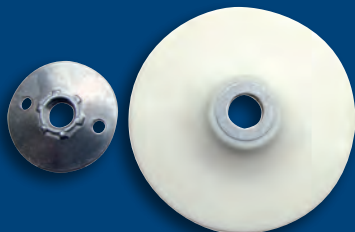

For type	Part number	Description	List
TAG-45MLH TAG-50MLH	9310-3008-00-00	Disc 100 x 22.23mm	
TAG-45MLH TAG-50MLH	DCA-BP-115XM14	Disc 115	
TAG-50MLH	DCA-BP-125XM14	Disc 125	



Rubber pad pictured with TAG series grinder

STANDARD FLANGES & OUTER WHEEL SCREWS



For type	Part number	Description	List
TAG-45MLH TAG-50MLH	42-05-80-H00*	Outer flange	
TAG-900 QJL	2700-040-00*	Outer flange	
	2700-041-00*	Outer wheel screw	

* Supplied as standard

M14 X 2 QUICK NUT

For type	Part number	List
TAG-45MLH TAG-50MLH	QN-M14	



TOOLS FOR MOUNTING GRINDING WHEELS



For type	Part number	Description	List
TAG-45MLH TAG-50MLH	13-40-04-014*	Combi spanner 14 x 19	
TAG-45MLH TAG-50MLH	13-08-02-147*	Socket bar	
TAG-900QJL	8081-0022-00-00*	Spanner H41	
TAG-900QJL	9610-1010-00-00*	Hex wrench H10	

* Supplied as standard

RED ROOSTER ATLUB OIL

All Toku Industrial grinders should be oiled regularly with Red Rooster ATLUB oil. This will significantly increase the lifetime of the air motor and reduces future service costs.




For type	Part number	Description	List
TAG-45MLH TAG-50MLH TAG-900QJL	ATLUB	Lubricating oil	

AIR ANGLE GRINDERS

TECHNICAL DATA

DIMENSIONS

Type	A mm	B mm	C mm	D mm
TAG-45MLH	267	85	33	50
TAG-50MLH	267	85	33	50
TAG-900 QJL	307	103	36	62

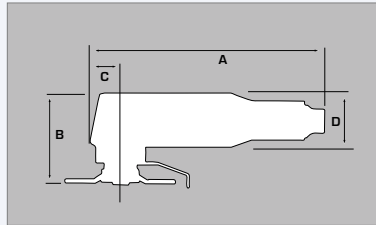

VIBRATION CONTROL

Vibration Damped Angle Grinders - up to 30% less vibration

Toku vibration controlled Angle Grinders are fitted with vibration damping side handles and the TAG-45MLH and TAG-50MLH both have a rubber grip to the main tool body as standard. These features are designed for smoother operation and greater comfort.

By selecting a vibration controlled option you not only decrease any potential health risks to your tool operators but you could also massively increase your productivity levels. Our vibration controlled Angle Grinders offer vibration levels of up to 30% less than the equivalent standard model. This translates to significant increases in the length of time the tool can be used before current EAV & ELV levels are reached. See p. 213 for our EAV & ELV chart.



The vibration damping side handle has a strong rubber joint which enables the side handle to flex

This helps reduce the vibration transfer from the main body of the tool to the operator



The perfect cutting and grinding consumables for your angle grinder

