

ROCK DRILLS


15 / 20 KG
DRILLING ACCESSORIES



TJ-15SV LBS

- 15 kg Class rotary rock drill
- 22 x 108 mm hex shank
- Vibration control from damping handles
- Suitable for quarry rock drilling applications
- Ergonomic & well balanced design
- Integrated noise muffler for operator comfort
- Up to 2,450 blows per minute
- Included oiler is for drilling lubricant only

Type	Brand	Shank size mm	Bore diameter mm	Stroke mm	Blows p/min	RPM	J/Blow	Air Cons l/sec	Weight kg
TJ-15SV LBS	TOKU	22 x 108	54	45	2,450	250	44.7	26	17.7

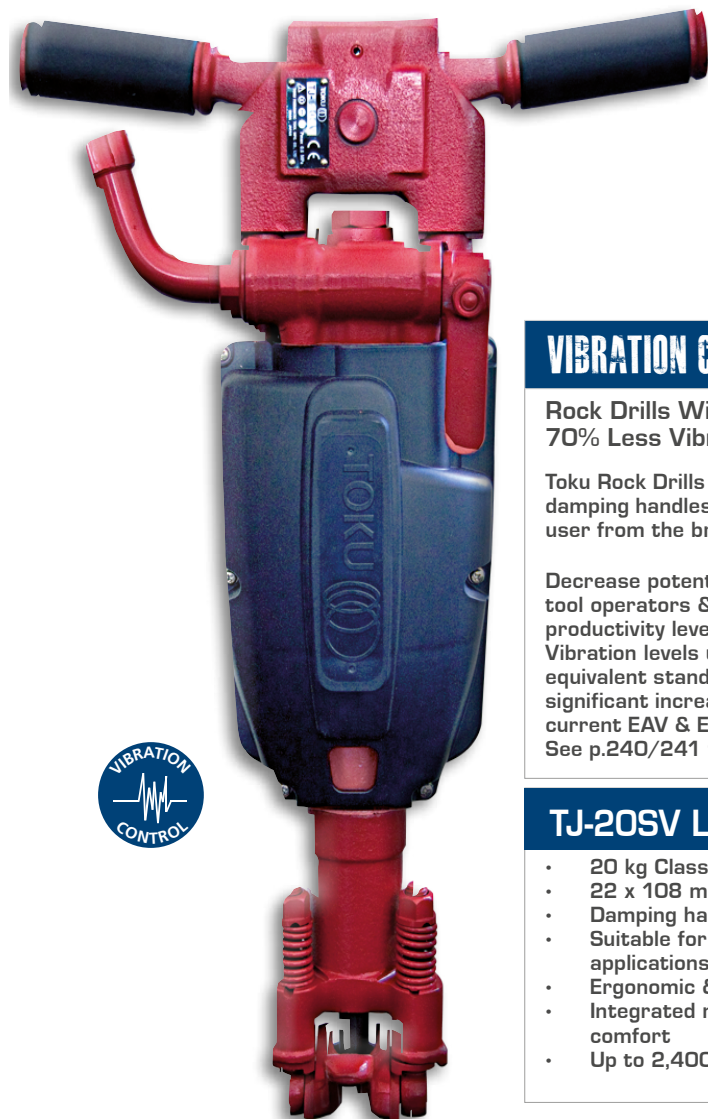

VIBRATION CONTROL



Rock Drills With Up To 70% Less Vibration

Toku Rock Drills are fitted with vibration damping handles for less transfer to the user from the breaker steel.

Decrease potential health risks to tool operators & massively increase productivity levels. Vibration levels up to 70% less than equivalent standard model gives significant increases in tool use before current EAV & ELV levels are reached. See p.240/241 for our EAV & ELV Chart.

TJ-20SV LBS

- 20 kg Class rotary rock drill
- 22 x 108 mm hex shank
- Damping handles
- Suitable for quarry rock drilling applications
- Ergonomic & well balanced design
- Integrated noise muffler for operator comfort
- Up to 2,400 blows per minute

Type	Brand	Shank size mm	Bore diameter mm	Stroke mm	Blows p/min	RPM	J/Blow	Air Cons l/sec	Weight kg
TJ-20SV LBS	TOKU	● 22 x 108	68	49	2,400	200	72.0	41	19



DURO YOKOTA can supply the following drilling products specifically made for the TJ-15SV LBS and TJ-20SV LBS TOKU rock drills.

Please ask for available diameters, lengths & connections:

MONOBLOC DRILLS



TAPERED RODS



B25 ROPE THREAD RODS



BUTTON HEADS



CROSS HEADS



LUBRICATING OIL

Protect your TOKU rock drills with the correct lubricating oil.

Our ATLUB oil is a water soluble synthetic lubricant developed specifically for pneumatic tools and is effective down to -25°C .

